


DATA SHEET

Thin Films Platinum Temperature Sensors 2.3x2.1x0.9mm



Application

These thin film Platinum resistance temperature sensors (PRTD) are designed for large volume applications where long term stability, interchange ability and accuracy over a large temperature range are vital. Typical applications are Automotive, White Goods, Heating-Ventilation and Air Conditioning, Energy management, Medical and Industrial equipment.

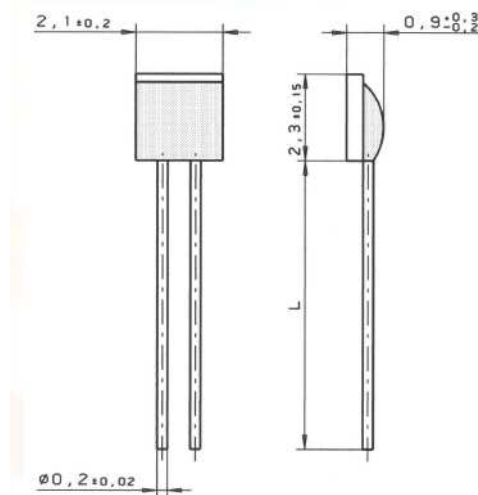

Technical Data

Properties	
Norm	DIN EN 60751
Range	- 70°C to + 500°C (permanent) (short exposure up to 550 °C)
Accuracy	Class B: $\pm(0.3 + 0.005 \times T)$ °C Class A: $\pm(0.15 + 0.002 \times T)$ °C 1/3 of Class DIN B
Classes Validity Range	Class B: - 70°C to + 500°C Class A: - 50°C to + 300°C Class 1/3 DIN: 0°C to + 150°C
Temperature Coefficient	TCR = 3850 ppm/K
Dimensions	2.3 x 2.1 x 0.9 mm
Leads	Pt clad Ni wire. Recommended connection technology: Welding, Crimping and Brazing
Lead length (L)	10 mm \pm 1, \varnothing 0.2 mm

Mechanical Properties	
Durability	Max. R0-Drift 0,04% after 1000 h at 500°C
Vibration Resistance	Min. 40 g acceleration at 10 to 2000 Hz, depending on the installation type.
Shock Resistance	Min. 100 g acceleration with 8ms half-Sinus-Wave, depending on the installation type
Environmental	Unprotected, only in dry environments

Electrical Properties	
Insulation Resistance	> 100 M Ω at 20°C; > 2 M Ω at 500°C
Measuring Current	100 Ω : 0,3 to 1,0 mA 500 Ω : 0,1 to 0,7 mA 1000 Ω : 0,1 to 0,3 mA <i>(Pay Attention to Self heating!)</i>
Self Heating	0,4 K/mW at 0°C
Response Time	Water Flow (v = 0,4 m/s): t50 = 0,05 s; t90 = 0,15 s; Air Flow (v = 2 m/s): t50 = 3,0 s; t90 = 10,0 s;
Note	Other accuracies, Other resistances and lead lengths available under request

Order Information		
Pt100	Class B	0364 0037
	Class A	0364 0025
	1/3 DIN	0364 0048
Pt500	Class B	0364 0018-20
Pt1000	Class B	0364 0102-10
	Class A	0364 0102-30